DVB-Titan USB Half-Mini-Card Reference Design

AS-102

Overview

Applications

Benefits

- **Excellent RF performance**
  - o
  - o
  - o
- **interference protection**
- **Low operating temperature**
  - o
- **Improved time to market**
  - o
  - o
- **Lower development costs**
  - o
  - o

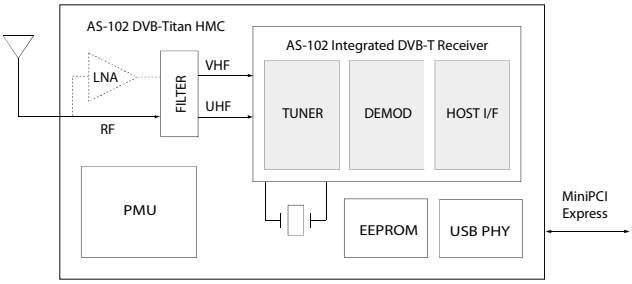

Features

- o
- o
- o
- o
- o
- o
- o
- o
- o
- o
- o
- o
- o
- o
- o
- o

This information contained herein is the exclusive property of Abilis Systems and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission. Subject to change without notice. AS-102 performance measured at 8K, GI=1/4, 8MHz, CH45=666MHz with external LNA. Copyright © 2008 Abilis Systems SA. All other trademarks mentioned in this document are trademarks of their respective owners.